

spindrift.

MARGARET RIVER

Design Guidelines v1

Contents

1. Introduction	02
1.1 Vision Statement	02
1.2 Approval Process	02
1.3 Timing	03
2. Sustainability	04
2.1 Rainwater Tanks	04
2.2 Water Use	05
2.3 Greywater Recycling System	05
2.4 Energy Efficient House Designs	05
3. Site Layout & Setbacks	06
3.1 Dwellings Per Lot	06
3.2 Minimum Floor Areas	06
3.3 Setbacks	06
3.4 Corner Lots	06
3.5 Site Levels and Retaining	07
3.6 Geotechnical Conditions	07
4. Architectural Character	08
4.1 Style	08
4.2 Materials	09
4.3 Colours	09
5. External Elements	12
5.1 Driveway	12
5.2 Letterboxes	12
5.3 Side and Rear Fencing	12
5.4 Corner Lot Fencing	13
5.5 Front Fencing	13
5.6 Fence Completion	13
6. Front Garden Landscaping	14
6.1 Landscape Packages	14
6.2 Landscape Guidelines	14
6.3 Recommended Design Principles	15
6.4 Bushfire – Low Threat Planting	15
6.5 Recommended Plant Species List	16
6.6 Waterwise Design Principles	18
6.7 Landscaping Maintenance	18
7. Ancillary Items	20
7.1 Opticomm Telecommunications	20
7.2 Storage & Services	20
7.3 Advertising	21
7.4 Rubbish	21

1. Introduction

1.1 Vision Statement

Welcome to Spindrift, a vibrant new masterplanned community located in the heart of Margaret River.

Designed to embrace the established beauty of its natural surrounds, Spindrift is a modern and meticulously designed neighbourhood where life is dynamic and the sense of community is strong. A place where you can immerse yourself in nature and still enjoy all the comforts and amenity of modern life.

1.2 Approval Process

- All house siting and designs are to be approved by the Developer.
- Approval by the Developer is required before applying for a building permit for the construction of a new dwelling.
- The Developer reserves the right to approve proposals based on architectural merit where aspects of a proposal may not necessarily comply with the Design Guidelines.
- The Developer approval is not a building approval nor does it imply compliance with the building code, Building Regulations or any other statutory requirements. Further approvals may be required.
- The Developer will assess all designs and if they are compliant with the Design Guidelines, provide a notice of approval.
- Please submit Building Plans to **contact@spindriftmargaretriver.com.au**


1.3 Timing

- Construction of a dwelling is required to start within 12 months of the original land settlement date and is required to be completed within 36 months from the original land settlement date.
- Side, rear and return Fencing and Driveways are required to be completed prior to occupation of the dwelling.
- All front landscaping, including fencing, retaining walls and letterboxes are required to be completed within 3 months from the date of the occupancy.
- These timing requirements must be adhered to by the land owner, unless agreed otherwise in writing by the Developer.

2. Sustainability

2.1 Rainwater Tanks

- Rainwater tanks of a minimum 4,500 litre capacity are to be connected and plumbed to all R20 and R15 dwellings.
- Rainwater tanks of a minimum 2,500 litre capacity are to be connected and plumbed to all R25 and R30 dwellings.
- Please see the Local Development Plan for further guidance.
- All rainwater tanks are to be fitted with a slow-release outlet that allows water to drain out to free up 2,500 litres capacity to capture and manage the next rain event.
- Rainwater tanks are to be sited on the lot in accordance with the rear and side setback requirements (Table 2a) of the R-Codes.
- Purchasers are strongly encouraged to install rainwater tanks with additional capacity above the minimum required to allow further harvesting of rainwater for domestic use.

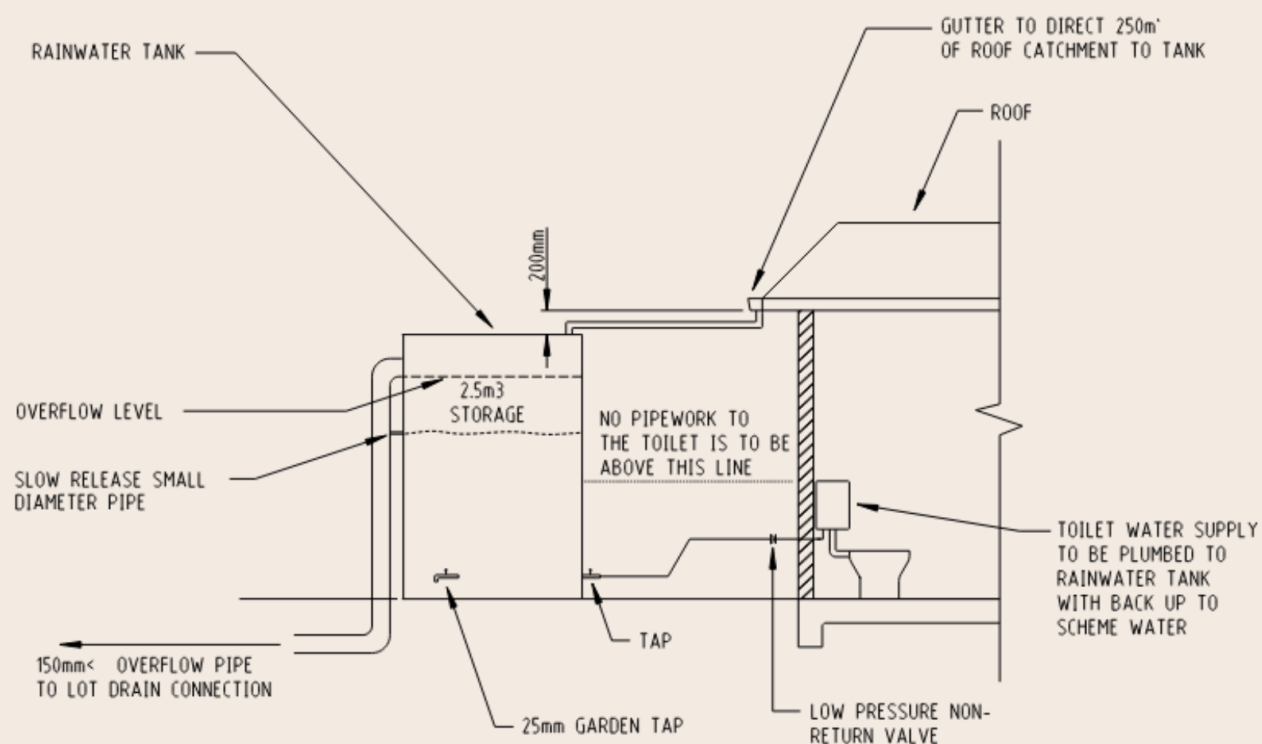

TWO AND A HALF CUBIC METRE'S (2500 litres) OF WATER STORAGE IS REQUIRED BETWEEN THE OVERFLOW LEVEL OF THE TANK AND THE SLOW RELEASE LEVEL. ALL WATER BELOW THIS CAN BE USED BY THE LOT OWNER

SCHEMATIC RAIN WATER TANK SHOWS ATTENUATION VOLUME AND LOT OWNERS WATER STORAGE

2.2 Water Use

- In keeping with the principles of sustainable development, dwellings should be designed to minimise water consumption. The following are encouraged:
 - All plumbing fittings shall be water efficient and comply with the requirements of the Water Efficiency Labelling Scheme (WELS) star rating system.
 - Each toilet shall have a 4.5/3 litre (minimum 4 star rated) dual flush cistern.
 - All shower heads shall be a minimum 3 star rated.
 - All tapware is to be minimum 4 star rated.

2.3 Greywater Recycling System

- Consider the use of grey water recycling for use on garden areas as a way to reduce the demand on scheme water.

2.4 Energy Efficient House Designs

- Good orientation facilitates energy efficiency by reducing the requirement to heat and cool the home.
- To promote access to Winter sunlight all homes are encouraged to locate the primary outdoor and indoor living areas on the northern side of the dwelling.
- By carefully considering the location of major openings prevailing winds can be used to cool the home during summer.

3. Site Layout & Setbacks

3.1 Dwellings Per Lot

- Only one dwelling is permitted per lot.
- Further subdivision of a lot, dual occupancy dwellings and relocatable homes are all prohibited, unless otherwise agreed by the Responsible Authority.

3.2 Transportable Dwellings

- No transportable dwellings are permitted.

3.3 Setbacks

- Setbacks must be in accordance with the Residential R Codes except where they have been varied by the Local Development Plan.

3.4 Corner Lots

- Dwellings on corner allotments must have a secondary facade which incorporates design features from the front façade, so that the building can be seen to address both street elevations. Examples of applicable features include feature windows, finishes / materials or articulation.
- Materials used at the interface of the primary and secondary facade must continue along the secondary facade for a minimum of 3m.
- Dwellings must have at least one habitable room window per story on the secondary facade frontage, forward of the return fence.
- Large areas of flat or blank walls to the street or reserve elevations will not be approved.

3.5 Site Levels and Retaining

- In order to accommodate a residence additional siteworks and retaining walls may be required.
- Any changes to site levels and/or retaining walls must adhere to the R-Codes and may be subject to approval by the Responsible Authority.

3.6 Geotechnical Conditions

- It is the responsibility of the property purchaser to ensure that the structural design of buildings and associated structures including boundary and garden walls is suitable for the site conditions applicable to the lot.
- It is encouraged that purchasers consider building methodologies that will limit the amount of site works required.

4. Architectural Character

4.1 Style

- Dwellings should support architectural design that is contemporary and energetic, with dynamic form and quality finishes. Alternative designs will be considered upon submission to the developer for approval.
- To reduce the overall mass of a building, the primary and secondary façade should be articulated through the use of openings, balconies, variety of materials, and recessed/projected elements on both the ground and upper floors.
- Each dwelling must include a feature at the entry that clearly defines the entry point from the Public Realm, provides articulation to the front façade and adds visual interest to the building.



4.2 Materials

- The use of appropriate feature materials such as architectural render, block work, brick work, masonry, rendered Hebel block, natural stone, exposed timber, cladding materials, glass and steel is encouraged or any other material deemed suitable by the Developer.
- Use of quality materials and finishes is recommended to give a timeless appeal and be fitting to the Margaret River area.
- Dwelling façades must be constructed using a mixture of external building materials, one of which must not make up more than 75% of the façade:
 - a) The roof, and any openings (e.g. garage door or windows etc.) are not included in this calculation.
 - b) Contrasting render colours may be considered as different materials, as long as one colour does not make up more than 75% of the façade.
 - c) Contrasting face brick colours will not be considered.
- Where possible, materials used on the edge of the front facade must continue for a minimum of 1m along the adjoining side elevation for non-corner allotments, including walls that are on the boundary.
- Materials and finishes such as unpainted or galvanised metal, raw fibre cement sheet and reflective glazing are not permitted.
- Roller shutters shall not be installed to any window or doorway visible from a public space, apart from garage door openings.

4.3 Colours

- External building colours should reflect a harmonious colour palette consisting of natural and earthy tones which complement the surrounding area and theme of the dwelling.
- Use of strong, bold or bright external colours that do not support the contemporary nature of the dwelling will not be approved.
- Accent colours in natural tones are encouraged to be strategically used for feature architectural elements.
- Gutters and fascias must match the roof colour.
- All service infrastructure (including drainage) shall not be visible from the street.

4.4 Roofs

Roof

- A variety of roof pitches are encouraged, including a pitched and flat roofs.
- Pitched roofs, which includes hip and gable and skillion types, must incorporate eaves with a depth of at least 450mm to each façade that addresses the public realm.
- Single hip and single gable roof forms to the front facade will not be approved.
- Hip or Gable roofs must have a pitch of at least 22 degrees.
- Skillion roofs must have a pitch of at least 8 degrees (maximum 15 degrees).
- Flat roofs are to be concealed from view on the primary or secondary elevation or from any public reserve by a parapet wall.

Eaves

- Eaves from the primary façade must return and continue for at least 3m along the adjoining wall(s), this excluding the front and side elevation of a garage and non-habitable rooms.
- Eaves on corner lots must extend for the full length of the secondary façade.



Materials

- Roof cladding must be non-reflective and must complement the home design and style. Allowable roof materials include:
 - Powder coated metal roofing in a corrugated profile or similar;
 - Low profile concrete tiles
- Roof materials that are not permitted include:
 - Curved profile tiles
 - Non-domestic deck profiles
 - Fibre cement sheeting
 - Terracotta or red style colours
 - Raw zincalume

4.5 Garages

- All lots must incorporate a fully enclosed garage that matches or complements the dwelling in materials, colours and finishes.
- Carports and open sided garages are not permitted.
- Triple car garages are generally discouraged, but may be considered on wider lots (over 18m frontage).
- Triple garages must comprise either one double and one single garage element or three single garage elements. The wall that contains the third door must be stepped back at least 500mm from the other front wall of the garage.
- Single Car Garages are not permitted.

5. External Elements

5.1 Driveway

- Only one crossover per lot is permitted and must be a minimum of 3m wide.
- The driveway must be constructed prior to occupancy of the dwelling.
- Driveways and any paths that are visible from the public realm must complement the building design and the external colour scheme. Acceptable driveway materials include:
 - exposed aggregate;
 - brick/concrete pavers;
 - coloured concrete;

5.2 Letterboxes

- Letterboxes are mandatory and must:
 - match and complement the dwelling facade & landscaping with respect to colours, materials and style.
 - be positioned close to front boundary line.
 - clearly display the property number.
 - integrate into the front fence (if applicable).
- Single post supporting letterboxes and temporary letterboxes are not permitted.
- Letterboxes must be installed within prior to occupancy.

5.3 Side and Rear Fencing

- The minimum permissible standard for fences dividing adjoining properties is 1.8m high Colorbond metal fencing.
- All fencing shall be in accordance with the Responsible Authorities requirements:



WOODLAND GREY

- Return fencing must be:
 - set back at least 1m from the closest front wall.
 - match the height and materials of the side fence.

5.4 Corner Lot Fencing

- Fencing along a secondary frontage must be as per the side and rear fence specification, but it must be set back 3m behind the closest front wall, so that the dwelling may address both the primary and secondary frontages to the Public Realm.

5.5 Front Fencing

- In order to enhance the sense of community front fencing is discouraged.
- Non-permeable front fencing is not permitted.
- Where front walls or fences are provided by the developer, these shall not be added to through the installation of additional solid or open fencing material.
- Where front fencing is installed it must meet the guidelines of the Responsible Authority.

5.6 Fence Completion

- Side, rear, corner & return fencing must be completed prior to occupation of the dwelling.

6. Front Garden Landscaping

6.1 Landscape Packages

- Selected lots are eligible for a front garden landscaping contribution where the Developer will contribute \$4,000 + GST towards the cost of Landscape construction by LD Total.
- To be eligible, purchasers must comply with the Front Garden Landscaping Terms and Conditions in the Contract of Sale and the Design Guidelines including the Rainwater Tank Requirements.
- Please note all lots may not be eligible. If in doubt, please seek further information from the Sales Agent.

6.2 Landscape Guidelines

- At least 50% of the front garden area must comprise of permeable surfaces such as:
 - garden beds with planting.
 - drought resistant lawn - warm season pre-grown turf such as Kikuyu species are encouraged.
 - lawn alternatives such as:
 - ground covers
 - river pebbles
 - lilydale toppings
- At least 15% of the permeable area must consist of planted garden beds.
- At least one tree with must be planted between the front building line and street boundary.
- All garden beds must be edged with either timber, masonry or steel edging materials.

Hard Surfaces

- Non-permeable surfaces shall be limited to driveways and pedestrian paths.
- The use of separate pedestrian paths should be avoided to increase soft landscaping opportunities.

The Verge

- Artificial turf is not permitted in the front garden or nature strip.
- Front Landscaping works include the verge outside the lot and this must be maintained.
- The verge must have a neat and even coverage of grass or planting, and any damage caused during construction of the home must be rectified.

6.3 Recommended Design Principles

Other design principles to keep in mind include:

- Landowners should further consider planting of deciduous trees to ensure protection of living areas from the Summer sun.
- Location and selection of plants to create visual interest, but also to serve a functional requirement i.e. screening fences or rainwater tanks
- Not all plants are suited to full sun, some species will prefer part shade. The direction each garden faces should in part dictate plant selection and placement.
- Large plants should not be located to block views from windows to the street to endure passive surveillance is achievable.
- Irrigation requirements must be considered when designing landscaping.
- Minimise additional hard surfaces such as paving in your front garden and consider the use of other materials for pathways i.e. steppers, timber sleepers.

6.4 Bushfire – Low Threat Planting

- For lots coded R15 (abutting the Wannang Bididi walk trail), landscaping within the front setback area is to comprise local native species only and is to be maintained to a 'low threat' state in perpetuity. 'Low threat' is defined under Element 2 of the Guidelines for Planning in Bushfire Prone Areas.

6.5 Recommended Plant Species List

Ground Covers

Myoporum parvifolium	Creeping Boobialla
Grevillea crithmifolia	Gingin Gem
Hemiandra pungens	Snake Plant
Scaveola crassifolia	Cushion Fan Flower
Westringea fruticosa	Low Horizon
Juniperus rigida	Shore Juniper
Carpobrotus glaucescens	Pigface

Small Shrubs

Callistemon viminalis	Little John
Agonis flexuosa	Nana
Westringea fruticosa	Zena
Rhaphiolepis Indica	Snow maiden
Melaleuca nesophila	Little Nessie
Melaleuca linariifolia	Little Red
Alternanthera denata	Little Ruby

Medium Shrubs

Westringea Dampiera	Coastal Rosemary
Grevillea banksii	'Superb'
Leucospermum Cordifolium	Orange/red or yellow
Leucophyta brownii	Cushion Bush
Pittosporum tobira	Miss Muffet
Lavendula sp.	Gardenia sp.

Large Shrubs

Adenanthos sericeus	Albany Woolly Bush
Murraya paniculate	Orange Jessamine

Strappy Leaf

Anigozanthus flavidus	Kangaroo Paw
Pattersonia occidentalis	Purple Flag
Dianella revoluta	Little Rev
Dianella caerulea	Cassa Blue
Conostylis candicans	Cottonheads
Liripoe muscari	Evergreen Giant

Grasses

Festuca glauca	Blue Fescue
Lomandra confertifolia	Little Con
Ophiopogon japonicus	Mondo Grass
Pattersonia occidentalis	Purple Flag

6.6 Waterwise Design Principles

- Plants should be chosen based on suitability to the Margaret River region. The list supplied are examples of waterwise plants but you should consult with landscaper contractors or local nurseries on other suitable species.
- Other principles for creating a waterwise garden include:

Mulching:

- Mulch looks good and suppresses weed growth in your garden but also reduces evaporation and acts as a layer to regulate the soil temperature throughout the year

Soil Conditioner:

- This additive can be turned through your garden to improve plant health and growth. A soil conditioner containing organic material is recommended, landscaper contractors or local nurseries will assist in recommending specific products for your needs based on your soil type.

Irrigation:

- Irrigation controllers programmed to apply water in the early morning are recommended. Water is a precious resource and should be applied to your garden to reduce evaporation. The Water Corporation website has additional tips on planning your garden to reduce water use. www.watercorporation.com.au

6.7 Landscaping Maintenance

- Landscaped areas must be established and maintained to benefit the urban environment.
- Gardens are required to be prepared appropriately to ensure longevity and sustainability.
- Gardens and lawns are required to be kept free of pest, disease and weeds.
- Front yard and verge grass must be cut regularly and kept in a 'low fuel' state to manage bushfire risk.

7. Ancillary Items

7.1 Opticomm Telecommunications

- The Developer is pleased to have engaged OptiComm, an independent, licensed Australian Telecommunications carrier, to install optical fibre to all homes within the Estate.
- Through these connections, families will have the unique opportunity to access ultra-high speed broadband services.
- Your home at Spindrift will be 'fibre ready' when you move in.
- All submitted plans must contain a note stating the provision has been made for connection to this service.
- Please see the Opticomm installation guide on the Development Website for more information.

7.2 Storage & Services

- All structures associated with construction shall be removed upon completion of a permeant dwelling.
- All temporary structures are to be removed upon completion of the permanent building.
- The developer will be under no obligation to approve an application for a sole structure if in its reasonable opinion, the sole structure would be in conflict with its obligation to all purchasers.
- Any addition to any proposed sole structure must be coloured to compliment the dwelling (galvanised metal is prohibited).
- Sheds must be screened away from any street and/or public view ie. behind primary dwelling line and in accordance with the relevant setback requirements set out in the R-Codes.
- Boats, caravans, trailers, commercial vehicles greater than 1 tonne or other recreational vehicles are not permitted to be parked on your property unless they are stored or screened from public view.
- External light fittings must not result in excessive light spill.
- Solar hot water systems should be located in the best functional position, however they must not be installed on the front elevation and must be screened from public view.
- External fixtures such as air conditioning units and service-related equipment must be positioned to minimise visibility from the street and of a colour which blends in with the roof.
- Roof mounted evaporative cooling units must be low profile, located below the roof ridgeline, and not visible to the public (preferably to the rear of the dwelling). All units must be coloured to blend with the roof of the dwelling.

- Air-conditioning units must be located below the eave line and must not be visible from public view.
- Clotheslines, rubbish bin storage, rainwater tanks, heating & cooling equipment, pool & spa equipment and service areas must not be visible from the street frontage or public view.
- Proper internal window furnishings must be installed to all street elevations prior to occupation of the dwelling.
- The use of canvas awnings, roller shutters and/or similar window coverings are not permitted, unless approved.
- Exposed plumbing must not be visible from the front or side street or public view, (excluding gutters and downpipes).

7.3 Advertising

- Installation of a sale board without a dwelling constructed is prohibited.
- Builders are permitted to one advertising sign (maximum 600mm x 600mm) per allotment during the construction of a dwelling. The sign must be removed within 30 days from construction completion.
- 'For Sale' signs are not permitted on vacant land.
- Handwritten or illuminated signs are not permitted.
- No other advertising signage is permitted on vacant land or occupied allotments.
- All signage must meet the guidelines of the responsible authority.

7.4 Rubbish

- The landowner shall not allow any rubbish to accumulate on a lot including; site excavations and building materials (unless neatly stored in a suitable sized bin/skip)
- The landowner must not place any rubbish including site excavations and building materials on adjoining land, reserves or any waterways. (Penalties apply for any illegal dumping)
- Vacant land must be kept in a 'low fuel' state to manage bushfire risk. All landowners must adhere to the relevant authorities bushfire notices.



Goldfields
ACTON | **belle**
PROPERTY

